


# SALUKA – N


# IP 66



**FTZÚ 08 ATEX 0133X**

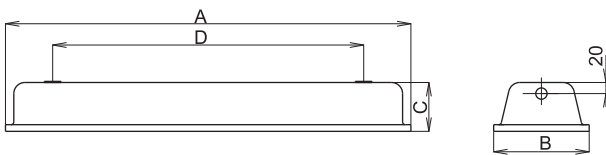

SALUKA, 2x36W, IP66



### Application of light fixtures in areas with danger of explosion

	Marking of external influences	Classification areas	
		Marking	Formation prescription
Danger of explosion of flammable dust	BE3N1	ZONE 22	ČSN EN 60079-14 ČSN EN 60079-10-2
Danger of explosion of flammable gases and vapors	BE3N2	ZONE 2	ČSN EN 60079-14 ČSN EN 60079-10-1



**Application:** SALUKA-N dustproof light fixture with resistance against water jets is designed for lighting premises with danger of explosion. Light fixture is certified by FTZÚ Ostrava-Radvanice (certificate FTZU 08 ATEX 0133X).

**Ballast:** **K** – electromagnetic ballast 230V/50Hz, with parallel compensation  
 / – electromagnetic ballast 230V/50Hz, without parallel compensation  
**EP** – electronic ballast 220-240V/50-60 Hz AC, 220-240V DC, 176-280 V DC (min. discharge ignition voltage of lamp ≥ 198 V DC)

**Body:** White painted metal sheet RAL 9001

**Cover:** Tempered safety glass

**Reflector:** White painted metal sheet RAL 9003

**Fastening:** Direct fastening on ceiling or wall lighted area, fastening on ceiling by means of ceiling brackets, suspension by means of suspension brackets with steel or chain

**Connection:** Screwless three-pole terminal block, max. diameter of wires 2,5 mm<sup>2</sup>

**Standard equipment:** 1 pc sealing cable gland, 1 pc sealing plug, 2 pcs suspension bracket and 2 pcs rubber gasket

**On request:** **Em** – non-maintained emergency lighting (1 h, 3 h)

**MULTI** – maintained emergency lighting (1 h, 3 h)

**1F/3F** – one or three phase through-wiring connection

**NEREZ** – body from stainless steel metal sheet

**AR** – aluminium reflector (deep radiant)

**PAR** – parabolic reflector

**AUTOTEST** – light fitting equipped with autotest

Providing with cable glands for armoured cables

Icon	Icon	Icon	Icon
<b>– electronic ballast, -20°C ≤ t<sub>a</sub> ≤ +40°C</b>			
054374	SALUKA-N-136-EP, 1x36W		1305 x 192 x 90 x 1160
054375	SALUKA-N-236-EP, 2x36W	T26/G13	1305 x 192 x 90 x 1160
054376	SALUKA-N-158-EP, 1x58W		1605 x 192 x 90 x 1400
054377	SALUKA-N-258-EP, 2x58W		1605 x 192 x 90 x 1400
<b>– electronic ballast, t<sub>a</sub> +55°C</b>			
054372	SALUKA-N-T55-118-EP, 1x18W	T26/G13	705 x 192 x 90 x 560
054373	SALUKA-N-T55-118-EP, 1x18W		705 x 192 x 90 x 560
<b>– electronic ballast, t<sub>a</sub> +60°C</b>			
056323	SALUKA-N-T60-258-EP, 2x58W		1605 x 192 x 90 x 1400
056322	SALUKA-N-T60-158-EP, 1x58W	T26/G13	1605 x 192 x 90 x 1400
056321	SALUKA-N-T60-236-EP, 2x36W		1305 x 192 x 90 x 1160
056320	SALUKA-N-T60-136-EP, 1x36W		1305 x 192 x 90 x 1160
<b>– maintained emergency lighting, t<sub>a</sub> 0-30°C</b>			
054378	MULTISALUKA-N-218, 2x18W, 1h		705 x 192 x 90 x 560
054379	MULTISALUKA-N-218-K, 2x18W, 1h		705 x 192 x 90 x 560
054380	MULTISALUKA-N-136, 1x36W, 1h		1305 x 192 x 90 x 1160
054381	MULTISALUKA-N-136-K, 1x36W, 1h		1305 x 192 x 90 x 1160
054382	MULTISALUKA-N-236, 2x36W, 1h	T26/G13	1305 x 192 x 90 x 1160
054383	MULTISALUKA-N-236-K 2x36W, 1h		1305 x 192 x 90 x 1160
054384	MULTISALUKA-N-158, 1x58W, 1h		1605 x 192 x 90 x 1400
054385	MULTISALUKA-N-158-K, 1x58W, 1h		1605 x 192 x 90 x 1400
054386	MULTISALUKA-N-258, 2x58W, 1h		1605 x 192 x 90 x 1400
054387	MULTISALUKA-N-258-K, 2x58W, 1h		1605 x 192 x 90 x 1400
<b>– maintained emergency lighting, electronic ballast, t<sub>a</sub> 0-30°C</b>			
054388	MULTISALUKA-N-118-EP, 1x18W, 1h		705 x 192 x 90 x 560
054389	MULTISALUKA-N-218-EP, 2x18W, 1h		705 x 192 x 90 x 560
054390	MULTISALUKA-N-136-EP, 1x36W, 1h	T26/G13	1305 x 192 x 90 x 1160
054391	MULTISALUKA-N-236-EP, 2x36W, 1h		1305 x 192 x 90 x 1160
054392	MULTISALUKA-N-158-EP, 1x58W, 1h		1605 x 192 x 90 x 1400
054393	MULTISALUKA-N-258-EP, 2x58W, 1h		1605 x 192 x 90 x 1400
<b>– special equipment</b>			
008060	Cable gland Ex M20x1,5		
008097	Plastic nut WISKA EMUG 20 M20x1,5		
008090	Sealing plug Ex M20x1,5		
001995	Reflector AR – 2x36W deep radiant		
001996	Reflector AR – 2x58W deep radiant		
051139	Set of ceiling stainless steel bracket SALUKA (2 pcs)		
051145	Pole bracket (50 mm diameter)		

**SALUKA-N, SALUKA-N-EM, MULTISALUKA-N-EM**

- Ⓜ II 3G Ex nA IIC T4 Gc
- Ⓜ II 3D Ex tc IIIC T70°C Dc
- Ⓜ II 3G Ex nA IIC T4 Gc
- Ⓜ II 3D Ex tc IIIC T70°C Dc