





APPLICATION

The terminal boxes are intended for the distribution of electrical energy, e.g. light circuits, heating circuits, control circuits, intrinsically safe circuits in places with an explosive gas and dust atmosphere, in hazardous areas 1, 2, 21, 22. Enclosure of glass fiber-reinforced polyester resin can be supplied in 7 sizes with various heights and they are suitable for fixed mounting. The terminal boxes are fitted to order with terminals and cable glands. For armored cables all terminal boxes are available with internal metal plate and cable glands for armored cables.

CONSTRUCTION

Enclosure: SMC glass fiber reinforced polyamide, color - black Cover: SMC glass fiber reinforced polyamide with integrated thermoplastic elastomer gasket, closes with four M5/M6 stainless steel screws.

TECHNICAL DATA

Certificate:	ATEX
Marking:	C € 0722
Apparatus category:	II 2G II 2D
Marking of explosion protection:	Ex e II T6, Ex e ia IIC T6, Ex ia IIC T6 tD A21 T80°C
Ambient temperature:	-20°C ≤ Ta ≤ +50°C
Degree of protection:	IP 66 category 1
Resistance to shock:	IK 07
Protection class:	I (protective earthing)
Rated voltage:	Up to 750 V AC
Rated current:	In accordance with table
Surface resistance:	$< 10^{9} \Omega$
Rated cross-section:	max. nominal cross-section 300 mm ²
N/PE rails inside the Enclosure:	2 pcs, 11 terminals 2x4mm ² max.
Weight (without cable glands):	SKX 12/E 0.5kg SKX 13/E 0,7kg SKX 14/E 1.0kg SKX 15/E 1.0 - 1,5kg SKX 16/E 3,5kg SKX 18/E 4,5kg SKX 20/E 7,0kg

MOUNTING

With two/four screws through the housing holes ϕ 6 mm at the peaks the rectangle:


SKX 12: 75 x 50 mm SKX 13: 75 x 100 mm SKX 14: 75 x 150 mm SKX 15: 125 x 150 mm SKX 15: 125 x 150 mm



SPARE PARTS AND ACCESSORIES

- 1. Enclosure, cover gasket
- 2. Ex e terminals
- 3. Ex e cable glands (metal, plastic)
- 4. Ex e plugs



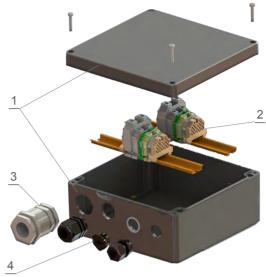

Terminal box SKX 12/E

Explosion protected terminal box type SKX 12/E, are intended for connection and distribution cables up to the nominal cross section of 4mm².

Conductor connection to the terminals:

 -1 mm^2 2 x 1 $-1,5 \text{ mm}^2$ and 2 x 1


Length of removing insulation on the conductor and torque 2,5 mm² - 10 mm - 0,5 Nm tightening the screw terminals:

4 mm² - 10 mm - 0,6 Nm

Max. number of line-up terminals wich can be fitted in SKX 12/E01: 5+2 PE terminals - 4mm², max rated current 20A

Max. number of mounted cable entries:

Cable gland Side	M16	M20	M25	
A-C	2	2	1	
B-D	1	1	1	



Terminal box SKX 13/E

Explosion protected terminal box type SKX 13/E, are intended for connection and distribution cables up to the nominal cross section of 6mm².

Conductor connection to the terminals:

2,5 mm²; 1 x 1 -2.5 mm^2 2 x 1 -1 mm^2 and 4 mm²; 1 x 1 – 4 mm² 2 x 1 -1.5 mm^2 and mm^2 ; 1 x 1 - 6 mm^2 $-2,5 \text{ mm}^2$ 2 x 1 and

Length of removing insulation on the conductor and torque 2.5 mm^2 - 10 mm - 0.5 Nm tightening the screw terminals: 4 mm^2 - 10 mm - 0.6 Nm

6 mm² - 12 mm - 1,2 Nm


Max. number of line-up terminals which can be fitted in SKX 13/E:

SKX 13/E01 - 8+2 PE terminals - 4mm², max rated current 20A SKX 13/E02 - 8+2 PE terminals - 6mm², max rated current 25A

Max. number of mounted cable entries:

DIMENSIONS [mm]

Cable gland Side	M16	M20	M25		
A-C	2	2	1		
B-D	4	3	2		



Terminal box SKX 14/E

Explosion protected terminal box type SKX 14/E, are intended for connection and distribution cables up to the nominal cross section of 6mm².

Conductor connection to the terminals:

2,5 mm²; 1 x 1 2,5 mm² and 2 x 1 -1 mm^2 4 mm²; 1 x 1 -4 mm^2 $-1,5 \text{ mm}^2$ and 2 x 1 mm^2 : 1 x 1 - 6 mm^2 $-2,5 \text{ mm}^2$ and 2 x 1

Length of removing insulation on the conductor and torque 2,5 mm² - 10 mm - 0,5 Nm tightening the screw terminals:


4 mm² - 10 mm - 0,6 Nm 6 mm² - 12 mm - 1,2 Nm

Max. number of line-up terminals which can be fitted in SKX 13/E:

SKX 14/E01 - 16+4 PE terminals - 4mm², max rated current 20A SKX 14/E02 - 16+4 PE terminals - 6mm², max rated current 25A

Max. number of mounted cable entries:



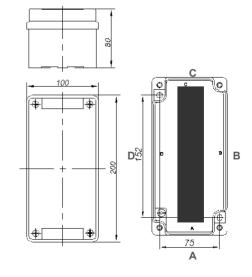



Terminal box SKX 15/E

Explosion protected terminal box type SKX 15/E, are intended for connection and distribution cables up to the nominal cross section of 25mm^2 .

Conductor connection to the terminals:

 -1 mm^2 2,5 mm²; 1 x 1 2,5 mm² 2 x 1 and 4 mm²; 1 x 1 – 4 mm² 2 x 1 -1.5 mm^2 and 6 mm^2 ; $1 \times 1 - 6 \text{ mm}^2$ $-2,5 \text{ mm}^2$ 2 x 1 and 10 mm²; 1 x 1,5 - 10 mm² 16 mm²; 1 x 1,5 - 16 mm² 25 mm²; 1 x 1,5 - 25 mm² 2 x 1,5 - 4, mm² 2 x 1,5 - 4 mm² 2 x 1,5 - 4 mm² and and mm^2 and

Length of removing insulation on the conductor and torque 2.5 mm^2 - 10 mm - 0.5 Nm tightening the screw terminals: 4 mm^2 - 10 mm - 0.6 Nm

2,5 mm² - 10 mm - 0,5 Nm 4 mm² - 10 mm - 0,6 Nm 6 mm² - 12 mm - 1,2 Nm 10 mm² - 12 mm - 2,0 Nm 16 mm² - 14 mm - 3,0 Nm 25 mm² - 14 mm - 3,0 Nm

Terminal fittings, number of conductors which can be fitted depending on conductor cross-section and continues current

Max.	Pated cros	CROSS SECTION [mm²] Rated cross section of conductors - rated cross section of terminals									
current [A]	2,5	4	6	10	16	25					
6	142										
10	51	80		Allov	wed combina	tions					
16	23	32	48								
20		20	30	50							
25			16	26	42						
35				12	19	29					
50	Unallo	wable combir	nations		8	12					
63						6					
Max. number of terminals depending of the enclosure size	28 + rails 2x24 PE	24 + rails 2x24 PE	20	15	10	10					


Max. number of mounted cable entries:


Cable gland Side	M16	M20	M25	M32	M40
A-C	4	3	2	2	1
B-D	6	4	3	2	2


Cable gland Side	M16	M20	M25	M32	M40
A-C	4	3	2	2	1
B-D	5	3	3	-	-

^{*}with N/PE rails









Terminal box SKX 16/E

Explosion protected terminal box type SKX 16/E, are intended for connection and distribution cables up to the nominal cross section of 35mm².

Conductor connection to the terminals:

2,5 mm²; 1 x 1 4 mm²; 1 x 1 - 2,5 mm² - 4 mm² - 1 mm² - 1,5 mm² and 2 x 1 2 x 1 and mm^2 ; 1 x 1 - 6 mm^2 - 2,5 mm² and 2 x 1 10 mm^2 ; 1 x 1,5 - 10 mm^2 $2 \times 1,5 - 4, \text{ mm}^2$ and 2 x 1,5 - 4 2 x 1,5 - 4 2 x 2,5 - 6 mm²; 1 x 1,5 - 16 mm² mm²; 1 x 1,5 - 25 mm² mm²; 1 x 2,5 - 35 mm² mm² 16 and 25 and mm^2 35 and

Length of removing insulation on the conductor and torque tightening the screw terminals:


2,5 mm² - 10 mm - 0,5 Nm 4 mm² - 10 mm - 0,6 Nm 6 mm² - 12 mm - 1,2 Nm 10 mm² - 12 mm - 2,0 Nm 16 mm² - 14 mm - 3,0 Nm 25 mm² - 14 mm - 3,0 Nm 35 mm² - 17 mm - 5,0 Nm


Terminal fittings, number of conductors which can be fitted depending on conductor cross-section and continues current

Max. current	CROSS SECTION [mm²] Rated cross section of conductors - rated cross section of terminals										
[A]	2,5	4	6	10	16	25	35				
6											
10	96			Allowed combinations							
16	32	96									
20		32	96								
25			32	96							
35				32							
50	Unallo	wable combir	nations		32						
63					16	24	24				
80						8	8				
Max. number of terminals	80	66	57	44	16	16	12				
depending of the enclosure size		double row	assembly	single row assembly							

Max. number of mounted cable entries:

Cable Side gland		M20	M25	M32	M40	M50	M63
B-D		9	9	5	3	3	2
A-C		7	5	3	3	-	-

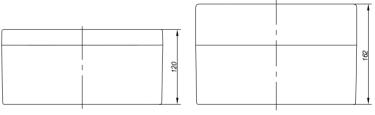

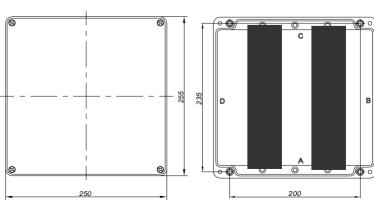



Terminal box SKX 18/E

Explosion protected terminal box type SKX 18/E, are intended for connection and distribution cables up to the nominal cross section of 70mm².

Conductor connection to the terminals: 35 mm²; 1 x 2,5 –35 mm² and 2 x 2,5 – 6 mm²

50 70

Length of removing insulation on the conductor and 35 mm² - 17 mm - 5,0 Nm

torque tightening the screw terminals:


50 70


Terminal fittings, number of conductors which can be fitted depending on conductor cross-section and continues current

Max.	R	CROSS SECTION [mm²] Rated cross section of conductors - rated cross section of terminals										
[A]	2,5	4	6	10	16	25	35	50	70			
6	264											
10	96	244			ı	Allowed co	mbination	s				
16	32	96	148									
20		32	96	148								
25			32	96								
35				32	64							
50	Unallow	able comb	inations		32	36	36					
63					16	24	24	36	36			
80						8	8	24	24			
100								8	8			
Max.	128	106	92	70	52	25	25	12	8			
terminals depending of the enclosure size	double row assembly					single row assembly						

Max. number of mounted cable entries:

Side	Cable gland	M20	M25	M32	M40	M50	M63
В	B-D	15	15	9	6	5	4
A	'-C	7	5	3	3	-	-

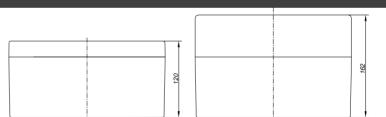

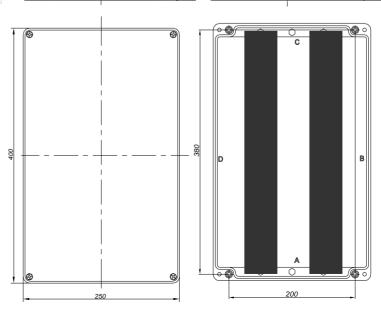

Terminal box SKX 20/E

Explosion protected terminal box type SKX 20/E, are intended for connection and distribution cables up to the nominal cross section of 70mm².


Terminal fittings, number of conductors which can be fitted depending on conductor cross-section and continues current

Max.	CROSS SECTION [mm²] Rated cross section of conductors - rated cross section of terminals										
[A]	2,5	4	6	10	16	25	35	50	70		
6	264										
10	96	244		Allowed combinations							
16	32	96	148								
20		32	96	148							
25			32	96							
35				32	64						
50	Unallowa	able comb	inations		32	36	36				
63					16	24	24	36	36		
80						8	8	24	24		
100								8	8		
Max. number of terminals depending of the	128	106	92	70	52	25	25	12	8		
of the enclosure size		double	row ass	embly		single row assembly					

Max. number of mounted cable entries:

Side	Cable gland	M20	M25	M32	M40	M50	M63
B-D		22	22	12	8	6	6
Δ	A-C		5	3	3	-	-



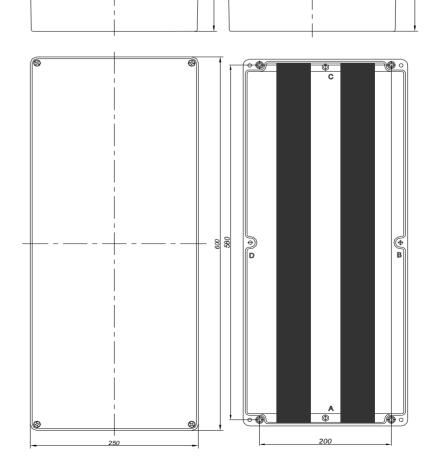

120

